

ZipLink® Belts

Win Your Race at the Pit Stop!

ZipLink®— Increase your production time



ZipLink®, ideal for whatever application where belt replacement time is an issue, for example:

- » **Cardboard industry**
bridge raising and bridge, slitting, cross cutting, box folding, stacking, delivery
- » **Wood processing**
grinding, sanding, polishing, braking, sawing, painting, pre-compressing
- » **Tire industry**
uncured rubber transport, general process and handling
- » **Airports & logistics** scanning, check in, collectors, inclined transport, airplane loading
- » **Tobacco processing**
conditioning, weighing, transport
- » **Magnetic conveyors**
- » **Food applications**

ZipLink® Belts:

- **Minimize replacement time on site by 75%**
- Eliminate splice failures
- Eliminate damages to transported products
- Eliminate damages to machine parts (drums, slider beds) due to mechanical fasteners



Belts that join instantly

Easy, no specific training required

ZIPLINK® BELT RANGE	<ul style="list-style-type: none"> » Shortest production downtime » Reduced maintenance time and cost » Extended belt service life » Ideal for difficult locations 	Increased production time
	<ul style="list-style-type: none"> » Protects both product and conveyor from being damaged » Extra high stability allows for easier tracking » Safe on-site installation, no heavy equipment needed » No loss of strength in the joint area 	Operational safety
	<ul style="list-style-type: none"> » Low friction bottom version helps reduce energy consumption due to the absence of splice areas 	Less energy consumption
	<ul style="list-style-type: none"> » Strongest in-house splicing; no outside fitters required » No need for any special tools or presses » Possible repair of damaged belt sections 	Economical use
	<ul style="list-style-type: none"> » Choice of top cover materials tuned to the application » ZipLink® Belts have a proven track record worldwide 	Proven technology

ZipLink® is an innovative belt range which is specially designed to offer benefits in a variety of different industries. Quick and simple installation or repair help to lower costs and reduce downtime. The design allows for repair or replacement of just small sections of the belt.






FAST
with **SPLICING & EASY**

ZipLink® Belts



The largest range of covers ... and we can make your specific belt on demand

Selection of Range ZipLink® Belts

Article no.	Nomenclature				Thickness [mm]	Hardness top cover [shore]	Min. pulley dia. flexing [mm]	Min. pulley dia. back flexing [mm]	Temperature min. [°F]	Temperature max. [°F]		
514927	Elastoflex	EZP	10/1	0 + A19	beige	/ 50 Sh	9.0	50A	100	120	5	176
560165	Fabric	EZP	10/1	01 + 0	black		3.6	–	64	100	40	250
583040	Fabric	EZP/C	10/2	0 + 0	white	FG	3.9	–	80	80	5	194
583010	Flexam	EZP	10/1	0 + 10	black	M2 FR	3.5	80A	50	80	5	176
583050	Flexam	EZP	10/1	0 + A20	black	FR	8.4	65A	100	150	5	176
583055	Flexam	EZP	10/1	0 + A66	black	FR	8.8	65A	100	150	5	176
583056	Felt	EZP	10/1	0 + FE	black		4.3	–	100	150	50	212
560124	Nitrile	EZP	10/1	01 + C57	white	FG	4.0	60A	75	100	-0.4	250
560119	Nitrile	EZP	10/1	01 + 08	white	CR FG HR	3.4	60A	75	100	-0.4	250
560121	Nitrile	EZP	10/1	01 + C37	brown		6.3	50A	75	125	-0.4	250
560141	Nitrile BX	EZP	10/1	0 + 05	blue	FG	3.4	75A	50	50	-0.4	250
560136	Nitrile BX	EZP	10/1	0 + C37 (NI)	blue		6.2	70A	75	120	-0.4	250
560120	Nitrile BX	EZP	10/1	01 + 05	blue		2.6	70A	50	75	-0.4	250
560110	Nitrile BX	EZP	10/1	01 + C37 (NI)	blue		6.3	70A	75	120	-0.4	250
583020	Nonex	EZP	10/1	0 + 10	white	FG	3.5	65A	50	80	5	176
560122	NR	EZP	10/1	01 + 32	red		5.1	40A	100	125	40	250
560111	NR	EZP	10/1	01 + C37	natural	CR	6.3	40A	75	100	40	250
560116	NR	EZP	10/1	01 + C52	tan	CR	7.2	45A	100	175	40	250
560162	Silam	EZP	10/1	01 + 05	white	CR HD FG HR OR	2.3	–	76	152	-76	392
560173	Silam	EZP	10/1	01 + 03	red	CR HD HR OR	5.3	–	101	101	40	349
560191	Teflon	EZP	10/1	0 + 01	grey	FG HR	3.4	–	75	–	-0.4	302
514615	Pletex	EZP	10/1	0 + 30	red		6.0	35A	60	80	5	176
560127	SBR	EZP	10/1	0 + C37	black		5.3	45A	75	100	40	250
560129	SBR	EZP	10/1	01 + C37	black	CR	6.3	45A	75	110	40	250

CR = cold resistant, FG = foodgrade, FR = flame retardant, HR = heat resistant, HD = hydrolysis resistant, OR = oil resistant

Easy replacement
of the complete
belt or of small
sections in the
event of damage.



Achieve
considerable cost
savings: easy to
use tooling kit and
no specialized
outside fitters
required.

ZipLink® is a breakthrough in belting design that combines cover materials with a structured link mesh that can be easily spliced at any length into a continuous belt without the need for special tools, presses or other equipment.

The ZipLink® construction eliminates points of weakness because there is no loss of strength in the splice area, making the belts stronger so they last longer than belts of other seamed or fused materials.

ZipLink® provides long life and flexibility for multiple applications. The belts can easily and quickly be changed without accruing significant downtime or expensive overtime. After converting to ZipLink®, time and personnel required to change belts may be reduced by more than half.



Complete toolbox available, including instruction CD

Working instruction



Score the back and lubricate the pin.



Pop the pin out at 1.5 cm from the edge.




Gently pull the pin out using pliers.



Carefully cut the top cover.



Press the ends back together firmly.

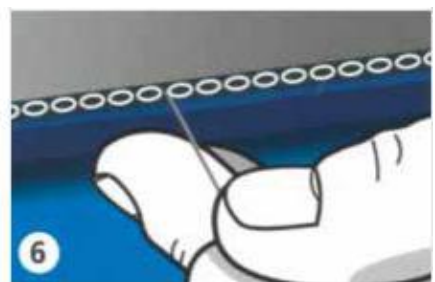

Pass the wire through and cut the excess.