


Plastic Modular Belt

Series **uni QNB** Type **Rough**

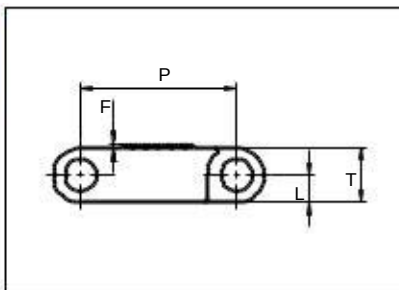

Straight running belt
Nominal pitch: 25.4 mm (1.00 in)
Surface type: Rough Top
Surface opening: Closed
Backflex radius: 40.0 mm (1.57 in)
Pin diameter: 5.0 mm (0.31 in)

Belt material & color	POM-SLF B		mm	in		mm	in
Pin material & color	PP B	P (Nominal)	25.4	1.00	L	4.4	0.17
		F	0.8	0.03	T	8.8	0.35

Non standard material and color: See uni Material and Color Overview.

Alternative pin and lock materials: Solid Lockpin: PA6.6 **D** Pin: PP **W** PA6.6 **B** PE **W** PBT **LG** and SS304 Endlock: PA6.6 **D**
 Lockpin: PBT **LG** PA6.6 **D** **N** PP **B** **W**

Belt width		Permissible tensile force (Belt/pin material)		Belt weight (Belt/pin material)		*Min. No. drive sprocket per shaft	Number of wear strips (Min. No.)	
		POM-SLF/PP		POM-SLF/PP			**Carry (pcs)	**Return (pcs)
mm	in	N	lbf	kg/m	lb/ft			
77	3.0	2695	606	0.6	0.43	2	2	2
153	6.0	5355	1204	1.3	0.86	2	2	2
229	9.0	8015	1802	1.9	1.29	2	2	2
305	12.0	10675	2400	2.6	1.72	3	3	2
382	15.0	13370	3006	3.2	2.16	3	3	2
458	18.0	16030	3604	3.8	2.59	4	4	2
534	21.0	18690	4202	4.5	3.01	4	4	2
610	24.0	21350	4799	5.1	3.44	5	5	3
687	27.0	24045	5405	5.8	3.88	5	5	3
763	30.0	26705	6003	6.4	4.31	6	6	3
839	33.0	29365	6601	7.0	4.74	6	6	3
915	36.0	32025	7199	7.7	5.17	7	7	4
992	39.1	34720	7805	8.3	5.60	7	7	4

Additional standard belt widths are available in steps of 76.3 mm (3.00 in). Additional non-standard belt widths are available in steps of 25.4 mm (1.00 in).

1983	78.1	69405	15602	16.7	11.19	14	14	7
------	------	-------	-------	------	-------	----	----	---

Additional standard belt widths are available in steps of 76.3 mm (3.00 in). Additional non-standard belt widths are available in steps of 25.4 mm (1.00 in).

2974	117.1	104090	23399	25.0	16.79	20	20	10
------	-------	--------	-------	------	-------	----	----	----

General belt tolerance is +0/-0.4% at 23°C/73°F and 50% RH. For exact belt width contact Customer Service. Non standard belt width on request.


*Max. Load per Drive Sprocket. Belt material: POM-SLF 2300 N (517 lbf), PP 1300 N (292 lbf).

**Max. Spacing between wear strips, Carry: 152.0 mm (6.00 in); Return: 304.0 mm (12.00 in).

— = Single Link

Accessories

Rubber Top

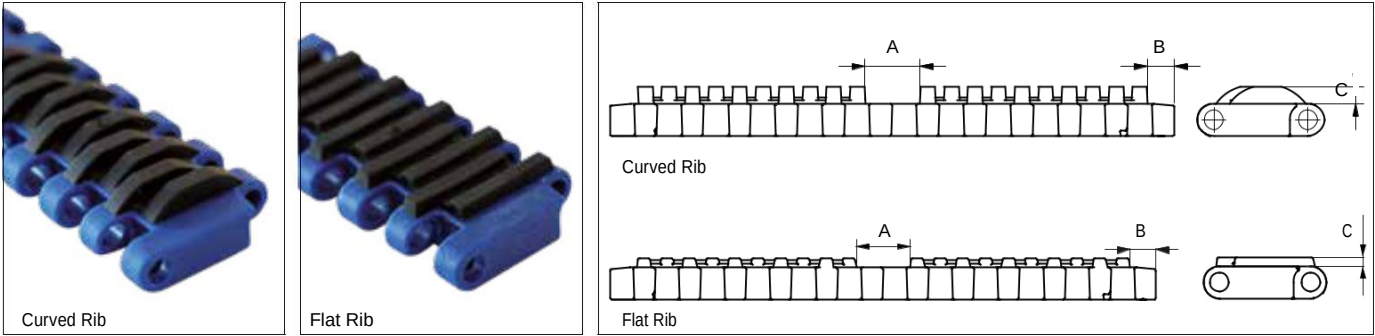


Type	Belt Material & color	Rubber Material & color	A		B		C		Link size	Width	
			mm	in	mm	in	mm	in		mm	in
Curved Rib	PP B	03 K	14.9	0.59	7.3	0.29	4.5	0.18	K300	75.8	2.98
									K600	152.0	5.98
Flat Rib			14.85	0.58	7.25	0.29	2.5	0.10	K300	75.8	2.98
									K600	152.0	5.98

Non Standard material and color: See uni Material and Color Overview.

Accessories

Flight

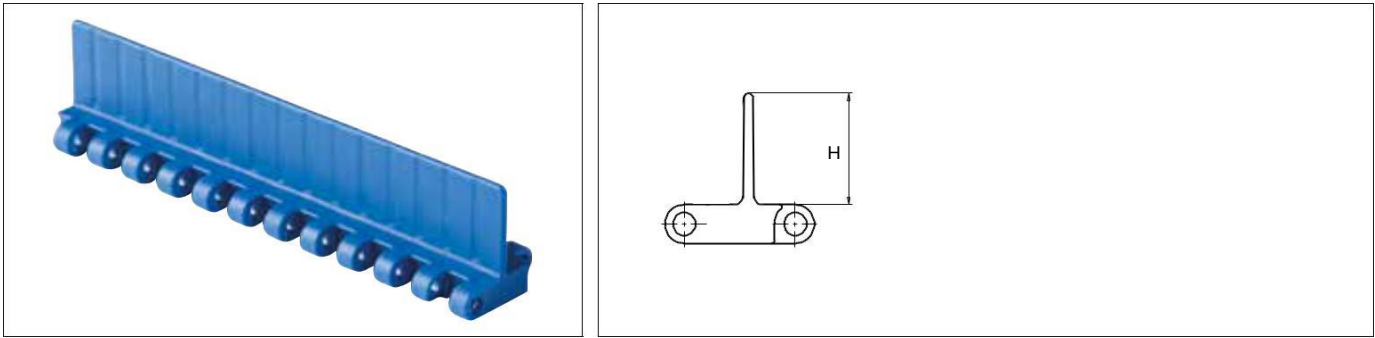


Type	Flight Material & color	H		Link size	Width		Indent	
		mm	in		mm	in	mm	in
Non Stick	PP-I W	25.4	1.00	K600	152.0	5.98	0.0	0.00
	POM-SLF B							

Non Standard material and color: See uni Material and Color Overview.

Accessories

Non Standard uni AmFlight

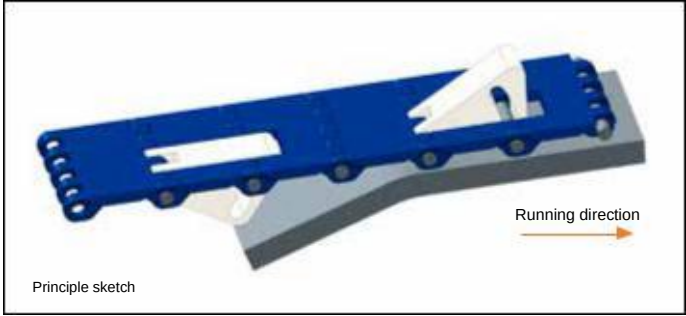

Sprocket

No. of teeth	Bore size								Overall I		Pitch		Hub		Dimens ion		Dimensi on		Singlerow/Two way	Molded LGPA6	
	Pilot bore	mm in	1.0025.4	30.0 181.	251.831.	501.38.1	40.0 1.57	60.02.36	2.50563.	mm	in diameter	mm	in diameter	mm	in diameter	mm	in A	mm			in B
Z10										80.3	3.16	82.2	3.24	65.0	2.56	34.7	1.36	45.5	1.79		
Z12										96.8	3.81	98.1	3.86	70.0	2.76	43.0	1.69	53.5	2.11		
Z15										121.5	4.78	122.2	4.81	70.0 ±100.0 ±104.0	2.76 ±3.94 ±4.09	55.4	2.18	65.5	2.58		
Z18										146.0	5.75	146.3	5.76	70.0 ±104.0 ±120.0	2.76 ±4.09 ±4.72	67.6	2.66	77.5	3.05		
Z19										154.2	6.07	154.3	6.07	70.0 ±120.0	2.76 ±4.72	71.7	2.82	81.6	3.21		

● Moulded sprocket ■ Moulded sprocket ■ Moulded sprocket



Other sprocket sizes are available upon request.
Round bores are always delivered with keyway.
Max load per sprocket shown does not take bore size into account.
Please also ensure that sufficient size shaft is chosen for corresponding load.
Other bore sizes are available upon request.
uni Retainer Rings: See uni Retainer Ring data sheet.
Width of tooth = 10.0 mm (0.39 in)
Width of OnePart sprocket = 25.0 mm (0.98 in)

uni UltraFit Two-Part Sprocket

No. of teeth	mm		in		Overall	diameter
	mm	in	mm	in		
Z12	38.1	1.50	40.0	1.57	96.8	3.81
Z13	40.0	1.57	42.0	1.65	104.8	4.13
Z15	42.0	1.65	44.0	1.73	121.5	4.78
Z16	44.0	1.73	46.0	1.81	129.7	5.11
Z18	46.0	1.81	48.0	1.89	146.1	5.75
Z19	48.0	1.89	50.0	1.97	154.2	6.07

■ Moulded uni UltraFit TwoPart Sprocket (Narrow adapter) ■ Moulded uni UltraFit TwoPart Sprocket (Wide adapter)

